

**ADO MAGNET TR-SP05**



Specification

|                       |   |
|-----------------------|---|
| <b>Chip</b>           | -                                       |
| <b>Bin/Step</b>       | 3-Step Macadam Ellipse.                 |
| <b>Weight</b>         | - kg                                    |
| <b>Finishing</b>      | Black / Custom Finish                   |
| <b>IP Rating</b>      | IP40                                    |
| <b>Power</b>          | 2W (Including PSU Consumption)          |
| <b>Operating Temp</b> | Ta=-25°C TO 50°C (Tc max=60°C)          |
| <b>Cover/Lens</b>     | Lens                                    |
| <b>Mounting</b>       | Track                                   |
| <b>Power Feed</b>     | Hardwire Tail or Male/Female Connectors |
| <b>Control</b>        | 0-10V / 1-10V / DALI                    |
| <b>Certification</b>  | CE                                      |
| <b>Lifetime</b>       | 50,000Hours @ 25°C                      |

|                           |                       |
|---------------------------|-----------------------|
| <b>Beam Angle</b>         | 15° / 24°             |
| <b>Color Temperature</b>  | 3000K / 3500K / 4000K |
| <b>Color Rendering</b>    | ≥ 90                  |
| <b>Rated Lumen Output</b> | 140lm                 |

Performance Data

|                       |     |
|-----------------------|-----|
| <b>Supply Voltage</b> | 24V |
|-----------------------|-----|

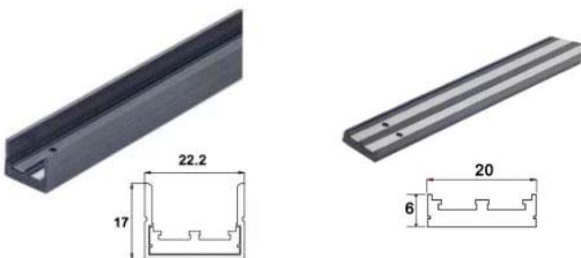

Performance Data Track – Connector

|            |          |
|------------|----------|
| TRACK      |          |
| MAX Amp    | 4 Ampere |
| MAX LENGTH | 2000mm.  |

|              |                 |
|--------------|-----------------|
| CONNECTOR    |                 |
| MOUNTING     | MAGNET          |
| WIRE SECTION | – LENGTH 0.5mm2 |

Photometric Data

Lamp=372.8 lm  
Max=941 cd

