



NEON-NT1615-J-AC230

Specifications

Type	Neon Flex
Dimension	W16mm. X H15mm.
Lifetime	50,000Hours@25°
Operating temp	Ta=25 °C to 60 °C (Tc max=65 °C)
Finish	UV & Flame-resistant PVC
Accessories	Aluminum profile
Mounting	Concealed in slot
IP Rating	IP67
Power	10W/m
Beam Angle	130°
Color Temperature	3000K
Color Rendering	≥ 90
Rate Lumen Output	670lm
Bin/Step	5-Step Macadam ellipse
Bending	Top
Supply voltage	AC110-220V




Accessories

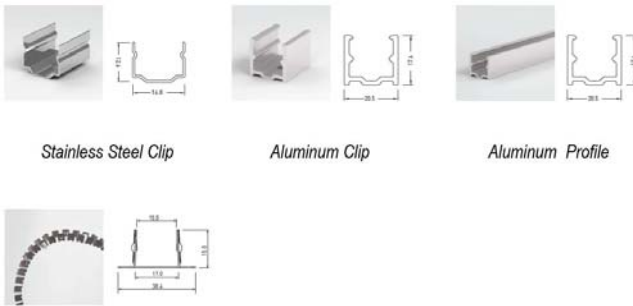

Stainless Steel Clip

Aluminum Clip

Aluminum Profile



Bendable Stainless Steel Clip

Direction Optional




Front Cable Entry:  
The cable could be hidden in all directions by the flexible design.

Side Cable Entry:  
The cable could be perfectly hidden to achieve seamless light connection.

Bottom Cable Entry:  
The cable could be perfectly hidden to achieve seamless light connection.

Photometric Data



Cable size / Max distance

0.5mm <sup>2</sup>	0.75mm <sup>2</sup>	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
20AWG	18AWG	17AWG	15AWG	13AWG
	4m	8m	10m	18m